




HIGHBAY, PARKING GARAGE FIXTURE

INSTALLATION INSTRUCTIONS



1.) SHUT OFF BREAKER AT PANEL
 & INSTALL BREAKER LOCKOUT:

2.) DISCONNECT ELECTRICAL & REMOVE OLD FIXTURE
 FROM MOUNTING ROD[Ⓐ] OR HIGHBAY CHAIN & HOOK[Ⓑ]
 (IF FLUSH MOUNTED, SEE #4. BELOW):

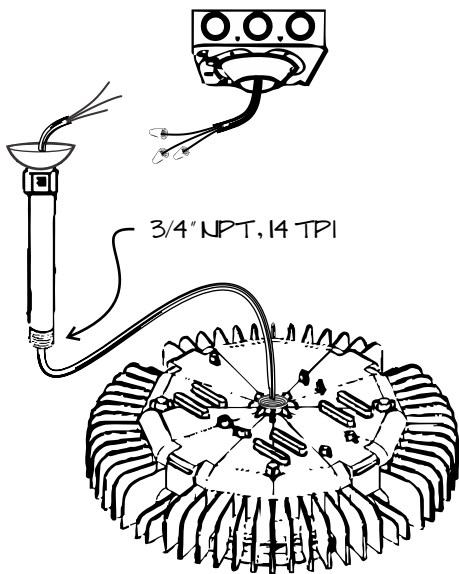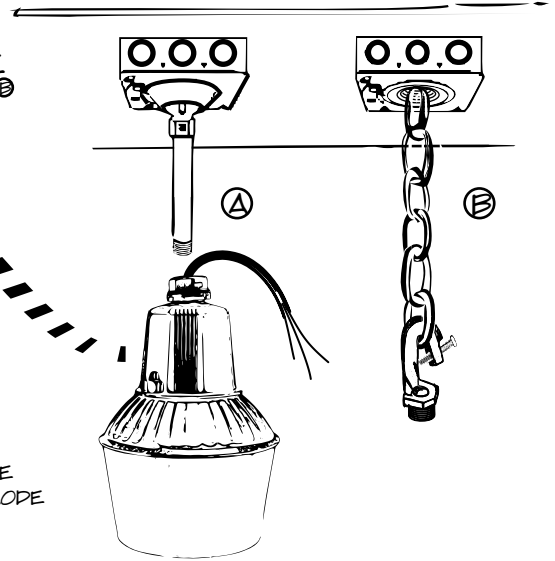


3.) FEED ELECTRICAL WHIP THRU TO J-BOX AND THREAD
 FIXTURE ONTO STD 3/4" ROD OR CHAIN HOOK:

4.) PARKING GARAGE: FLUSH MOUNT

VS.

PENDANT MOUNT

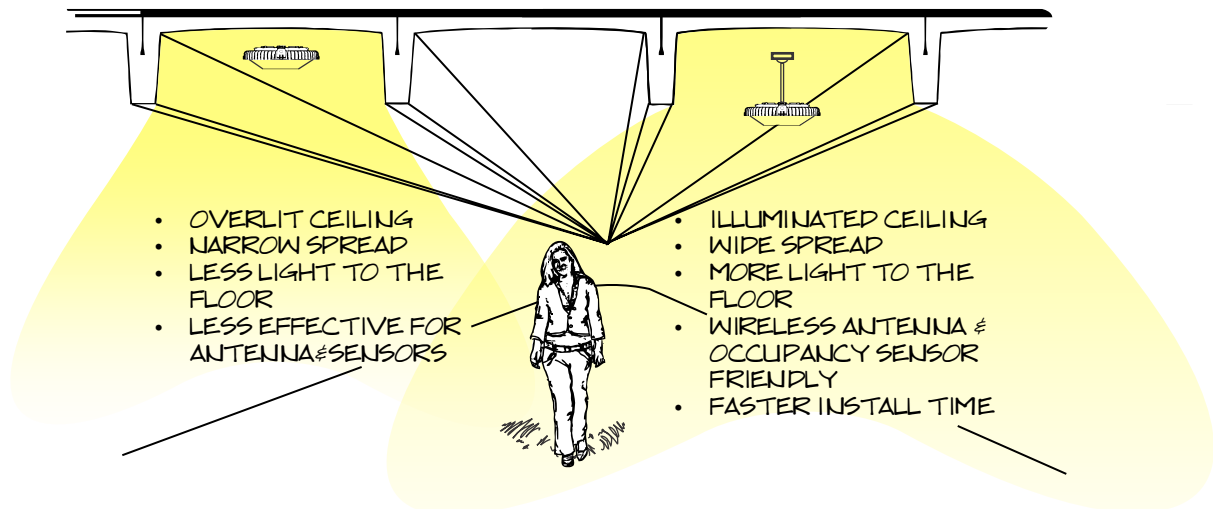



WARNING



**FAILURE TO FOLLOW THESE WARNINGS AND ASSEMBLY INSTRUCTIONS COULD
RESULT IN SERIOUS INJURY OR DEATH.**

RISK OF FIRE OR ELECTRICAL SHOCK:

- Do not alter, relocate, or remove wiring, LED lamp holders, power supply, or any other electrical component. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- Installation of this assembly requires a person familiar with the construction and operation of the luminaire's electrical system and the hazard involved. If not qualified, do not attempt installation. Contact a qualified electrician.
- Unless otherwise indicated, do not make or alter any openings in the compartment of wiring or electrical components during installation of this assembly. Plug all unused openings in the compartment of wiring or electrical components.
- To prevent wiring damage or abrasion, Do not expose wiring to edges of sheet metal or other sharp objects. Inspect wiring and components for damage
- Do not use when enclosure is broken.